


Hardware installation

- 1 Connect the ADSL modem to the telephone plug using a telephone wire.
- 2 Connect the ADSL modem to the wall socket using a power cord.
- 3 Connect the digital receiver to the television primarily using an HDMI cable or, if the television does not contain an HDMI connection, a SCART cable.
- 4 Connect the digital receiver to the TV antenna socket using an antenna cord.
- 5 Connect the digital receiver to a free network connector in the ADSL modem using a network cable.
- 6 Insert batteries into the digital receiver's remote control.
- 7 Install a USB memory stick into the digital receiver's USB connector.
- 8 Connect the digital receiver to the wall socket using a power cord.
- 9 Connect the computer to a free network connector in the ADSL modem using a network cable.

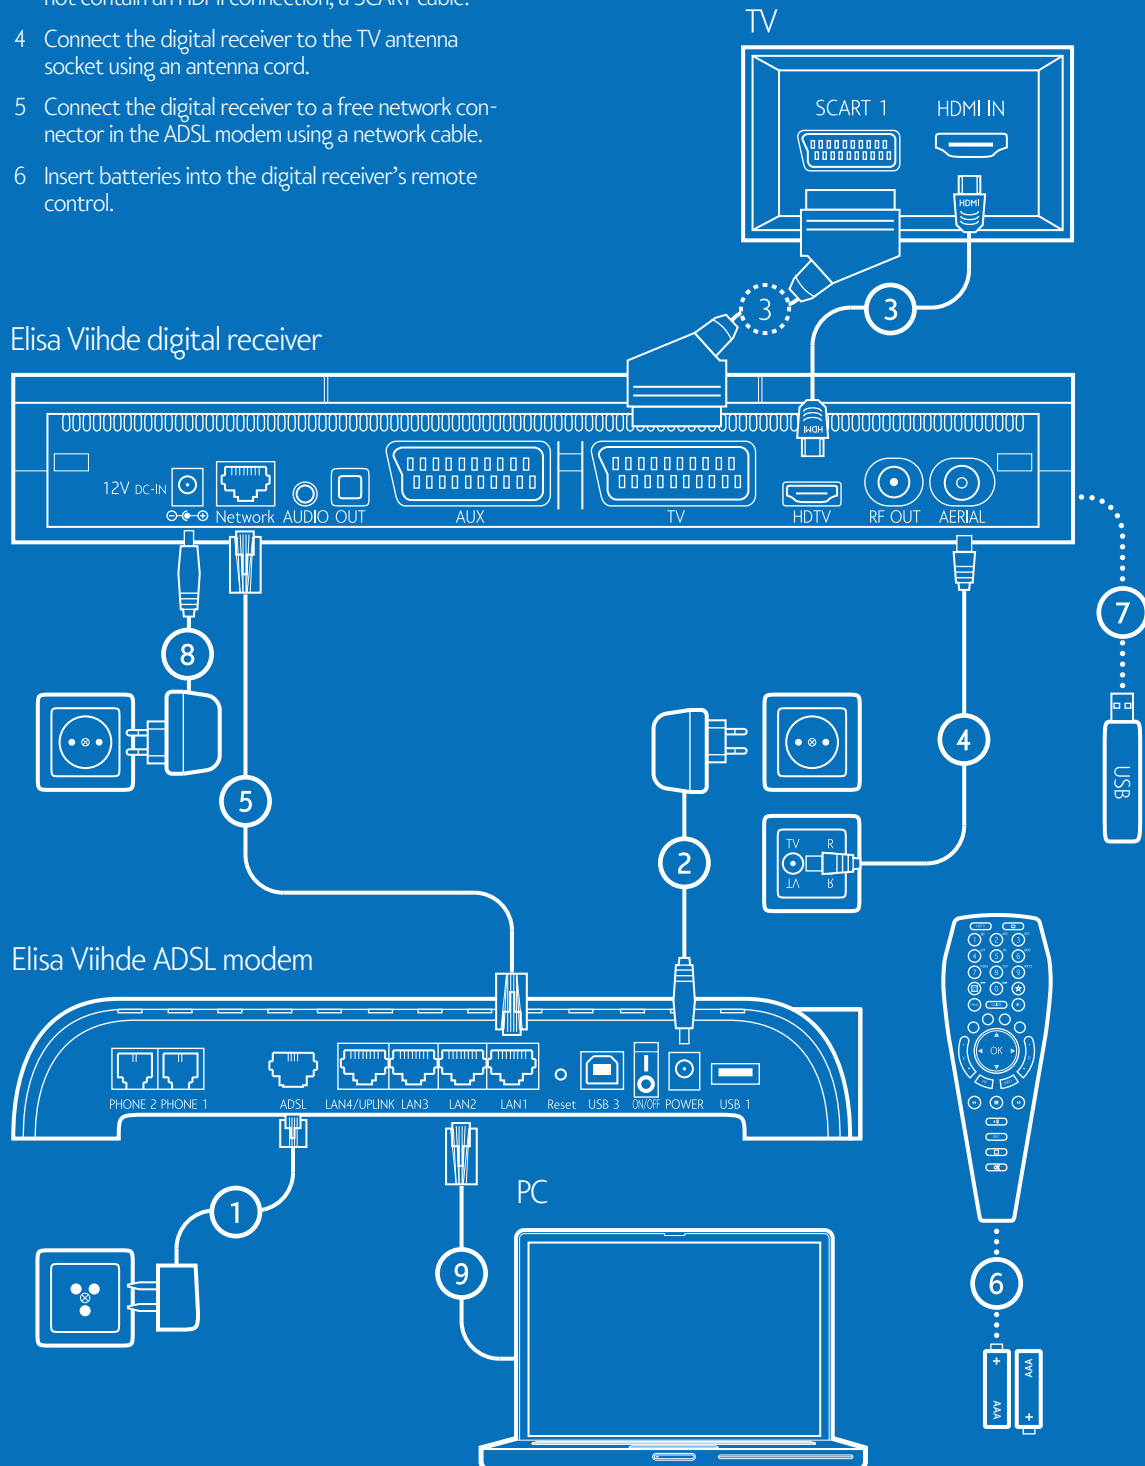


TV

With Elisa Viihde, you can watch regular TV channels on the cable and antenna network using any digital receiver. Subscription channels and saved programmes are always watched through an internet connection.

You can start using the TV services by following the instructions shown on the TV screen and below:

1. Turn on the TV and select the input connection used (usually AV).
2. If you connected your digital receiver to the TV using an HDMI cable, select the most suitable display mode from the screen and save the selection following the instructions shown on the TV screen.
3. Start the TV service by clicking OK.
4. Select 16:9 (widescreen) or 4:3 (traditional) as the TV screen type.
5. Enter a PIN code of your choice for parental control using the remote control's number keys.
6. Select whether the digital receiver is being used in an antenna or cable network.
7. Wait until the automatic tuning of TV channels is completed. The channel search may take several minutes. You can see the progress on the TV screen. Once the channel search has ended, you can see a summary of the channels found.
8. Enjoy Elisa Viihde!

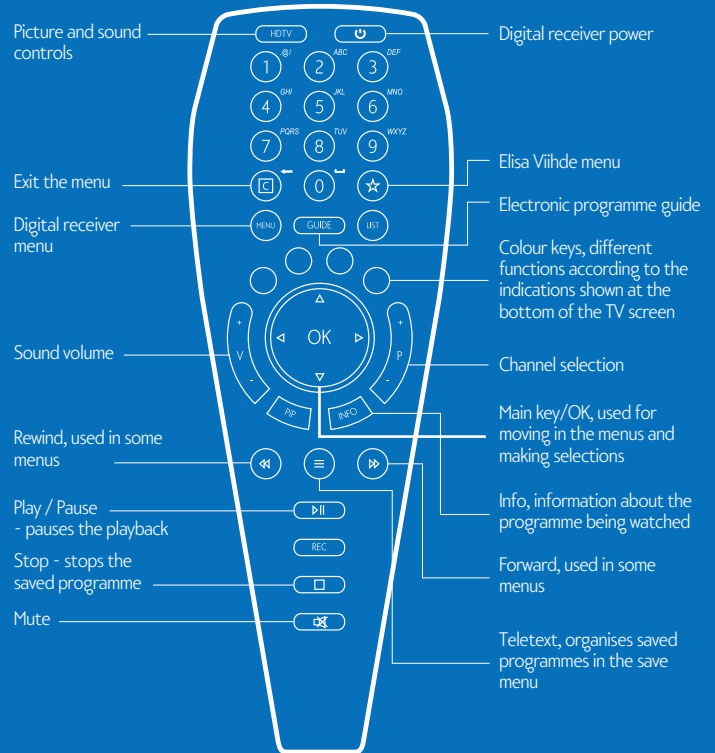

Broadband

Elisa Viihde contains a high-speed broadband connection. You can use the connection while watching TV. The ADSL modem settings have already been set for normal use, and the broadband connection is immediately available. The name (SSID) and password (WPA Key) of the wireless network (WLAN) are indicated in the label at the bottom of the device.

You can change the ADSL modem settings:

1. At www.elisa.fi/omaelisa. The changes will be sent to the modem through the internet.
2. Through the modem's internal web management at <http://192.168.100.1>

Data security

Elisa Viihde contains a data security service for your computer. Ensure your computer's information security by installing the data security service. The installation instructions and licence key are included in the data security service package. Once you have installed the data security service on your computer, insert a USB memory stick into your digital receiver. The memory stick acts as a buffer memory for your digital receiver's timeshift.

Signal lights:

- Power -> The modem is switched on.
- ADSL -> The ADSL line is active.
- Internet -> The modem is connected to the internet.
- LAN 1-4 -> The modem is connected to the computer through a fixed local network cable.
- WLAN -> The wireless network is in use.

Detailed operating instructions for the service:
elisa.fi/viihde

Installation and guidance on use:
0600 96 060
(EUR 0.89/min + local network charge
/mobile network charge)

Failure notifications:
050 960 600
(local network charge/mobile network charge)